> Dimensions (mm) and weight (kg)

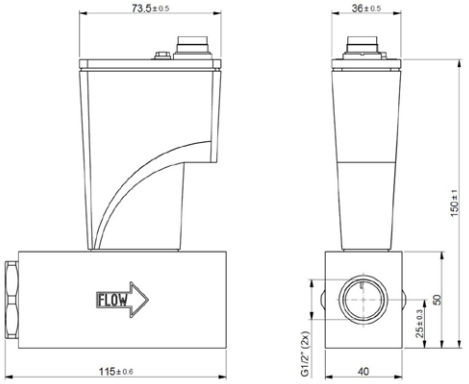

Weight: 1,8 kg

Dimension table adapters (RS-type)

Compression type	1/2"BSPP Size A
adapter 12 mm OD	33.5
adapter 20 mm OD	36.5
adapter 25 mm OD	42.0
adapter 1/2" OD	33.5
adapter 3/4" OD	34.8
adapter 1" OD	41.6

Face-seal	1/2"BSPP A
adapter 1/2" inlet	27.6



Dimension A is typical finger-tight.

> Options and accessories

- Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software.	
- BRIGHT compact local Readout/Control module - E-5700 / E-7000 Power Supply	
- Interconnecting cables for power and analog/digital communication - PiPS Plug-in Power Supply	
- Optional ATEX Zone 2 Cat. 3 protection. Hereto we will furnish extra cover(s) for mechanical impact protection (see pictures), including applicable certificate(s).	

> Alternatives

- IN-FLOW^{CTA} direct (no by-pass) Mass Flow Meter model T13 (flow capacities from 20 up to 200 l_n/min Air-equivalent Full Scale) - IN-FLOW^{CTA} direct (no by-pass) Mass Flow Meter model T15 (flow capacities from 500 up to 5000 l_n/min Air-equivalent FS)

[illegible]

[illegible]

[illegible]

Bronkhorst®
HIGH-TECH